




% .....  
%% .....  
%& .....  
&" ..... (  
' " ..... )  
' "% ..... )  
' "& ..... \*  
' "' ð ..... +  
' "' "% % î ð ðí ..... +  
' "' "% & ..... ,  
' "( ..... -





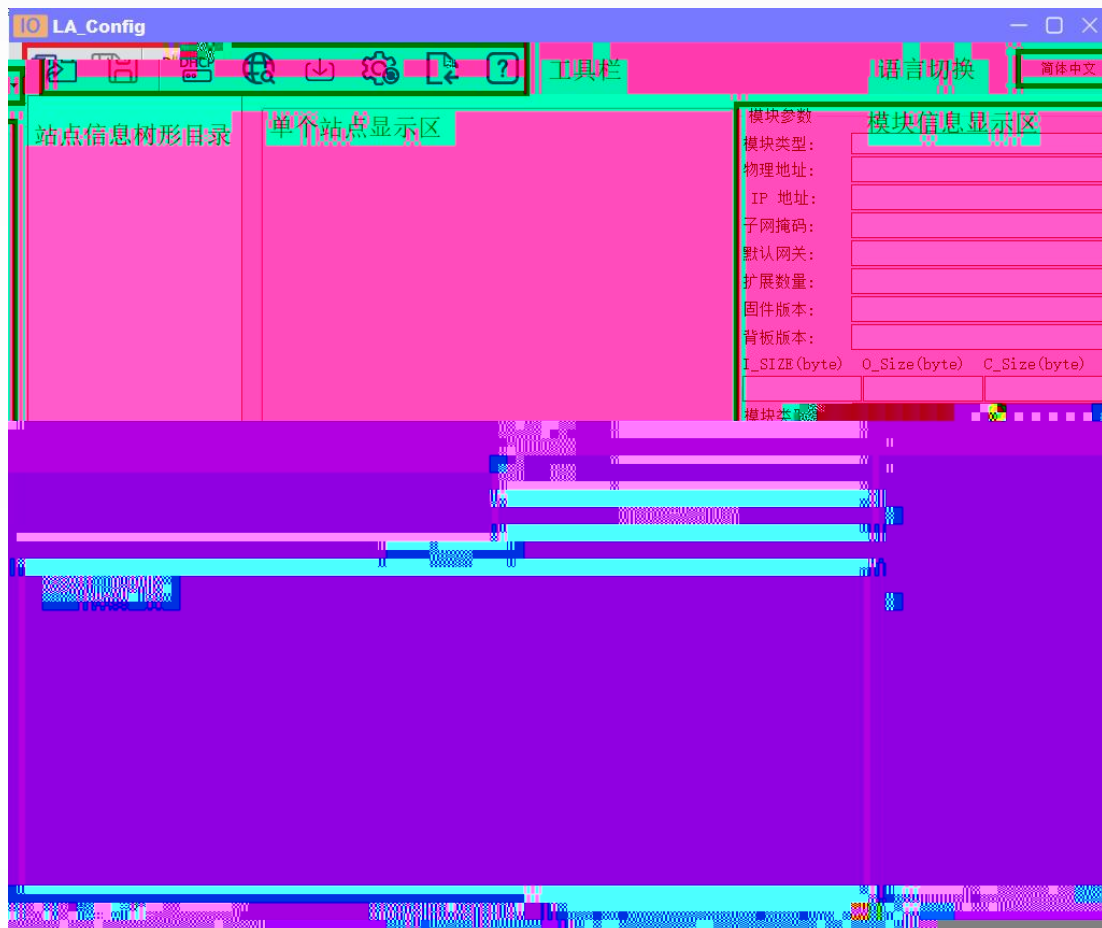

1







The screenshot shows a software window with a blue title bar and a close button. Below the title bar is a table with the following headers: mac, IP地址, 子网掩码, 默认网关, 模块名称, and 状态. The table body is currently empty. At the bottom of the window, there is a control bar containing a '扫描时间' field with the value '5 :S', and five buttons: '全局扫描', '修改IP', '恢复出厂设置', and '重启模块'.

mac	IP地址	子网掩码	默认网关	模块名称	状态
-----	------	------	------	------	----

扫描时间 5 :S    全局扫描    修改IP    恢复出厂设置    重启模块

This screenshot shows the same software window as above, but with a large green rectangular area covering the table and the bottom control bar. A small blue rectangular box is visible at the bottom center of the green area.

⌘

↑

⌘

⌘



